


Pre-Made Assemblies

Penflex builds a number of common assemblies to stock that are ready to load and ship at a moment's notice from our Houston, TX location. Industry leading welds are performed by ASME Section IX certified welders and each assembly is leak tested, hydrotested, tagged, and stored in boxes or on easy-to-roll racks.

All flanged assemblies are made with Type A pressure-tight stub ends.

Nom. I.D. (in.)	Part Number	Length (ft)	Nom. O.D. (in.)	Maximum Pressure @ 70°F (PSIG)		Bend Radius (in.)		Weight per Foot (Lb.)	Qty. Per Box/Rack
				Working	Nominal Burst	Dynamic	Static		
Corrugated Hose Assembly 316L Hose / 304L Double-Braid / 316 Hex Male NPT Ends									
¾"	3/4x25-316/304-DB-6-WHNxWHN	25	1.19	1,241	4,964	6.58	2.65	17.25	70
¾"	3/4x50-316/304-DB-6-WHNxWHN	50	1.19	1,241	4,964	6.58	2.65	32	35
1"	1x25-316/304-DB-6-WHNxWHN	25	1.41	955	3,820	7.5	3.33	21	60
1"	1x50-316/304-DB-6-WHNxWHN	50	1.41	955	3,820	7.5	3.33	39	30




Corrugated Hose Assembly 316L Hose / 304L Double-Braid / 316 150# Fixed x Floating Flanges

1"	1x20-316/304-DB-150-6-FIXxFLT	20	1.41	275	1,100	7.5	3.33	18	14
1-1/2"	1-1/2x20-316/304-DB-150-6-WNFxFLT	20	2.11	275	1,100	11.75	5.08	33.2	100
2"	2x10-316/304-DB-150-6-FIXxFLT	10	2.58	275	1,100	12.55	6.27	32.2	176
2"	2x20-316/304-DB-150-6-FIXxFLT	20	2.58	275	1,100	12.55	6.27	51	88
3"	3x10-316/304-DB-150-6-FIXxFLT	10	3.98	275	1,100	22.00	9.00	50	108
3"	3x20-316/304-DB-150-6-FIXxFLT	20	3.98	275	1,100	22.00	9.00	78	54
4"	4x10-316/304-DB-150-6-FIXxFLT	10	5.08	275	1,100	27.00	13.00	72.2	80
4"	4x20-316/304-DB-150-6-FIXxFLT	20	5.08	275	1,100	27.00	13.00	109	40
6"	6x10-316/304-DB-150-6-FIXxFLT	10	7.33	264	1,056	36.00	19.00	112	56
6"	6x20-316/304-DB-150-6-FIXxFLT	20	7.33	264	1,056	36.00	19.00	175	28
8"	8x20-316/304-DB-150-6-FIXxFLT	20	9.31	275	1,100	40.00	20.00	358	18
10"	10x20-316/304-DB-150-6-FIXxFLT	20	11.45	275	1,100	50.00	25.00	513	10

Corrugated Hose Assembly 316L Hose / 304L Double-Braid / 316 300# Fixed x Floating Flanges

2"	2x20-316/304-DB-300-6-FIXxFLT	20	2.58	684	2,736	12.55	6.27	56	77
3"	3x20-316/304-DB-300-6-FIXxFLT	20	3.98	600	2,400	22.00	9.00	89	45
4"	4x20-316/304-DB-300-6-FIXxFLT	20	5.08	444	1,766	27.00	13.00	130	32
6"	6x10-316/304-DB-300-6-FIXxFLT	20	7.33	264	1,056	36.00	19.00	217	18

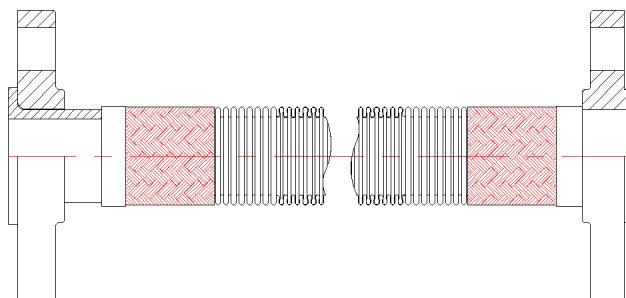

Pressures reflect limiting factor. For most 150# options, it is the flange. Contact the factory for assemblies with CRN requirement. See catalog for further information.

* Racks weigh between 500-550 lbs. and can be wheeled directly onto truck bed.